



## AVANT 12 programmable multiband amplifier for terrestrial, 32 digital filters and programming via ASuite (Bluetooth®)

Multi-input multiband amplifier, perfect for individual or MDU (Multi Dwelling Unit) terrestrial installations, that allows individual programming of channels available on 4 VHF+UHF (DTT) inputs, in a total of 32 digital filters. The multiband amplifier has 5 inputs, configurable in 2 distribution modes: FM-4x[VHF+UHF] or FM-DAB-3xUHF, and can achieve programmable amplification and balancing of the different RF inputs. In addition, it includes 4G/5G filtering, making the device discriminate by itself the programming of the filters up to channel 48 (LTE700).

Thanks to the built-in **Bluetooth®** antenna, it is possible to carry out advanced programming of the multiband amplifier wirelessly from a smartphone or tablet (Android/iOS), with the **ASuite** application. With this application, the professional user can perform a wide range of functions:

- Channel filter programming
- Channel level autoadjust for balancing all filters
- Manual fine-adjust after the autoadjust for each channel separately
- Activation of the antenna powering
- Import/export configurations

RED compliant

<b>Ref.</b>	532201
<b>Logical ref.</b>	AVANT12
<b>EAN13</b>	8424450318997

## Packaging info

<b>Box</b>	1 pcs.
------------	--------

## Physical data

<b>Net weight</b>	982.00 g
<b>Gross weight</b>	1,150.00 g
<b>Width</b>	201.00 mm
<b>Height</b>	120.00 mm
<b>Depth</b>	42.00 mm
<b>Main product weight</b>	924.00 g

## Highlights

- With the **ASuite** application, advanced programming of the device can be carried out wirelessly (**Bluetooth®**), easily and conveniently from a smartphone or tablet (Android/iOS)
- Single device with **2 distribution modes**: 4 inputs support VHF/UHF, or one input is for DAB and the other 3 for UHF
- **High output level**: up to 124dBμV (DIN45004B), to reach a large number of outlets
- Up to **32 individually programmable filters**, with individual digital filtering of each channel, including adjacent channels
- **Digital processing of the channels**, resulting in a perfectly balanced signal level between the different channels at the output
- **Automatic signal regulation** in each filter (AGC). Also allows fine adjust of the output level after regulation

- **High selectivity** VHF/UHF digital filters: >30dB rejection (@ 1MHz)
- SAW (Surface Acoustic Wave) filter for **rejection of 4G/5G signals** from channel 48, with the best selectivity and stability
- **DVB-T and DVB-T2** compatible
- **TForce technology**: terrestrial signal level is always balanced and adjusted to the optimum value
- Power supply at the inputs for **antenna powering**, when the signal requires it
- **LED status indicator** as well as physical autoadjust button built into the control panel
- High shielding chassis (Zamak) to **protect against electromagnetic interference**
- **Very light and compact size** for a high performance control unit (196x122x43mm)
- **100% European design and manufacture**: fully automated manufacturing and subjected to rigorous quality controls

## Functionalities

---

### Channel filter programming




The desired channels are selected from each of the available inputs, assigning a filter to each of them up to a maximum of 32. In addition, the selected channels can be processed, shifting them in frequency.

### Channel level autoadjust



The signal level of each channel is automatically processed by the device, bringing out the maximum possible level and balancing all filtered channels, so that there are no signal fluctuations between them.

### Channel level manual fine adjustment

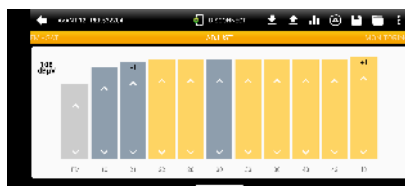

ASuite allows a further adjustment of  $\pm 3\text{dB}$  to the previously autoadjust. It is carried out manually and independently for each filter, for those channels that require a finer adjustment.

## Antenna power supply switching



It manages the flow of current through each of the inputs to power antennas or preamps, when the processed signal requires it.

## Import/Export configurations



ASuite offers saving of configurations, as well as the loading of previously stored ones, saving time to the professional in the installation.

## Technical specifications : Ref. 532201

Number of inputs			5	
Number of outputs			1	
Bands		FM	DAB	UHF
Frequency range	MHz	87 ... 108	174 ... 230	470 ... 694
Number of filters		--	1	32
Channels per filter		--	--	1
Gain	dB	29	75	78
Gain adjustment range	dB	0 ... 25	AGC	AGC
Manual regulation after auto-adjustment	dB	-5 ... 5	-5 ... 5	-3 ... 3
Slope regulation	dB	--	--	0 ... 5
Input level	dBµV	79 ... 104	40 ... 100	40 ... 100
Output level DIN45004B	dBµV	124	124	124
Output level EN50083	dBµV	128	128	128
Programmable output level	dBµV	80 ... 108	87 ... 115	90 ... 118
Noise figure	dB	7	7	6
Selectivity	dB	> 20	> 65	> 65
Powering per inputs	Vdc	0	12	12
Max current input	mA	0	70	70
Input voltage	Vac		220 ... 230	
Mains frequency			50 Hz / 60 Hz	
Max. current	mA		165	
Max. power consumption	W		14.9	
Protection index (IP)			20	
Operating temperature	°C		-5 ... 45	