

## WIRELESS ROUTER WITH LOW POWER WIFI MODE INTERNET THROUGH THE COAXIAL CABLE



REF. 769301



### USE YOUR TV DISTRIBUTION SYSTEM TO PROVIDE A LOCAL NETWORK, NOW WITH WIRELESS ACCESS

The **CoaxData system** enables the use of coaxial, PLC or fibre optics networks to distribute Internet services to a certain number of points, providing a non-invasive distribution system that preserves the quality of the transmission.

**CoaxData Home WiFi (ref. 769301)** transforms the data signal distributed by the coaxial system in a wireless signal through an Ethernet interface gateway or "Low Power WiFi". Also it can be configured as a router and/or Access Point.

#### ✓ Highlights

- **Low Power WiFi.** The low power signal mode (3dBm) can be activated/deactivated using the frontal switch.
- **Guaranteed coverage** even with high coaxial attenuation (>85 dB).
- Data transference up to **700Mbps** coaxial and 500Mbps over PLC.
- Avoid entering passwords using the **WPS** functionality (available through a press key on the front panel).

#### ✓ Product Range

REF.	DESCRIPTION	EAN 13
★ 769301	COAXDATA GATEWAY 1Gbps	8424450170373
769201	COAXDATA 1Gbps COAX+PLC 2xETH.	8424450165843
769202	COAXDATA 1Gbps COAX+PLC 1ETH+1SFP	8424450165850
769203	COAXDATA 1Gbps COAXIAL 1xETH.	8424450167724

# WIRELESS ROUTER WITH LOW POWER WIFI MODE

## INTERNET THROUGH THE COAXIAL CABLE



Televés recommends the use of the Low Power mode (3dBm)


### Main Features

- Fully compatible with all the CoaxData Gigabit range.
- Use up to **253 slaves** in a single network. All data is secured with encryption systems.
- WiFi 802.11bgn with MIMO 2x2 that supports up to **300 Mbps** in the 2,4GHz band.
- 3dBm** power emission when using the Low Power WiFi mode.
- 5 frontal status LEDs.**


### Technical Specifications

References	769301	
<b>Coaxial/Ethernet interface</b>		
Connectors	2xF	
Frequency range - Data	MHz	2...67,5
Frequency range - TV	MHz	87...2150
Max. attenuation	dB	85
Output level	dBμV	130
Spectral power density	dBm/Hz	-50
Coverage	km	0,3 PLC / 1,2 Coax
<b>Data</b>		
Ethernet connectors	3xRJ45 100/10Mbps. Auto MDI/MDIX	
QoS	IGMP snooping, MLDv2, IGMPv3, IGMPv2	
Standards	Priorización VLAN IEEE802.1p	
	IEEE 802.11b/g/n IEE 802.3 10/100/1000BASE-T HomePlugAV IEEE P 1901	
Devices per master	253	
<b>General</b>		
Powering	Vac	108...254
Power (low consumption mode)	W	1,8
Dimensions (Wid x Hei x Dep)	mm	160 x 43 x 130
Protection Index	IP	20


### Web management tool

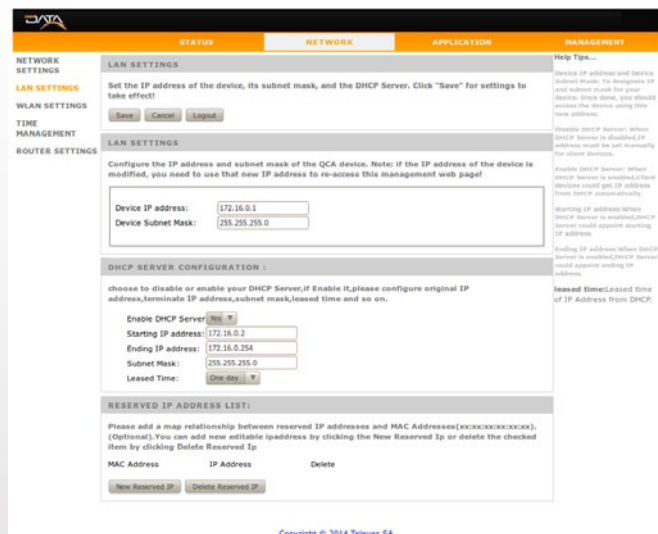

### Description

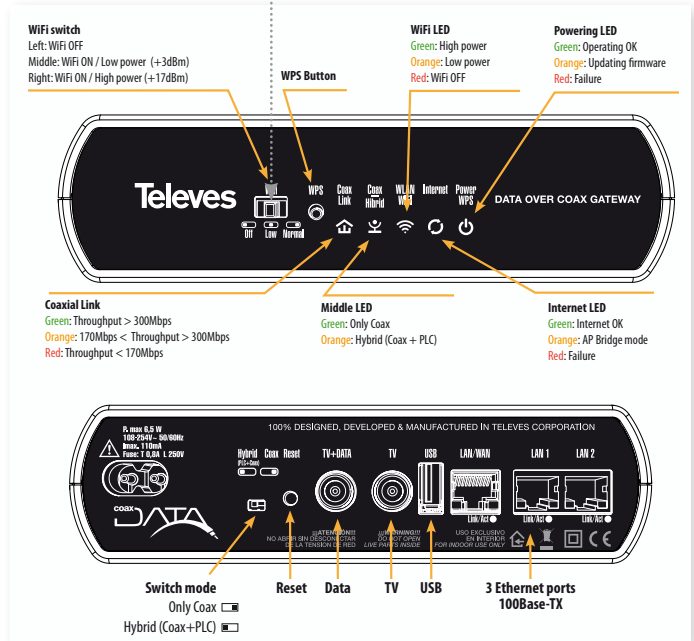

### Application example

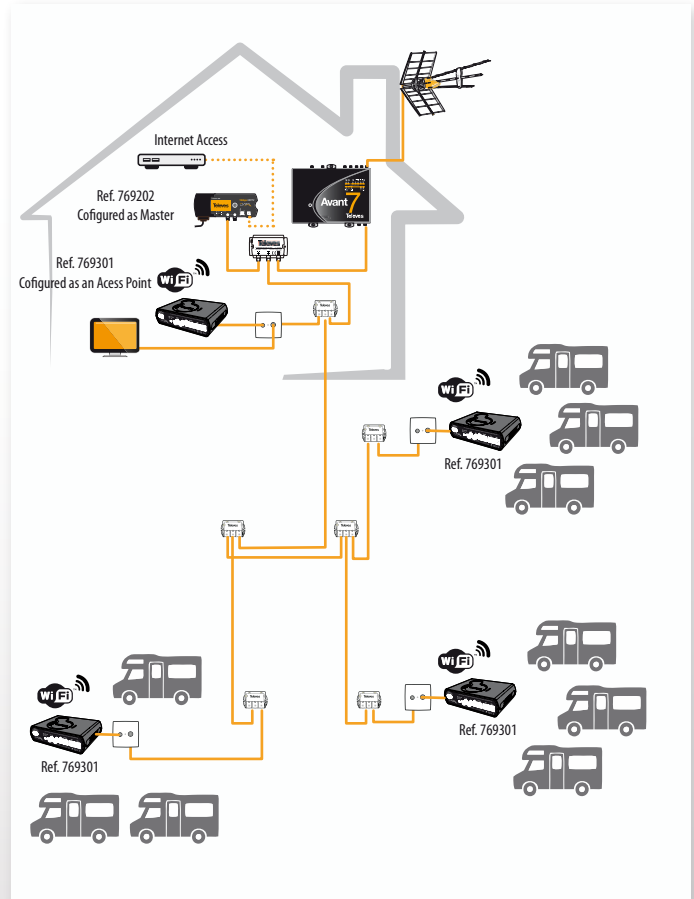

# WIRELESS ROUTER WITH LOW POWER WIFI MODE

## INTERNET THROUGH THE COAXIAL CABLE

### ✓ CoaxData 1Gbps Series



▶ **769201**  
HDTV coaxial + PLC  
2 ETH connectors




▶ **769203**  
HDTV coaxial  
1 ETH connector



▶ **769202**  
HDTV coaxial + PLC  
1 ETH connector  
1 SFP connector

### ✓ CoaxData 1Gbps Description

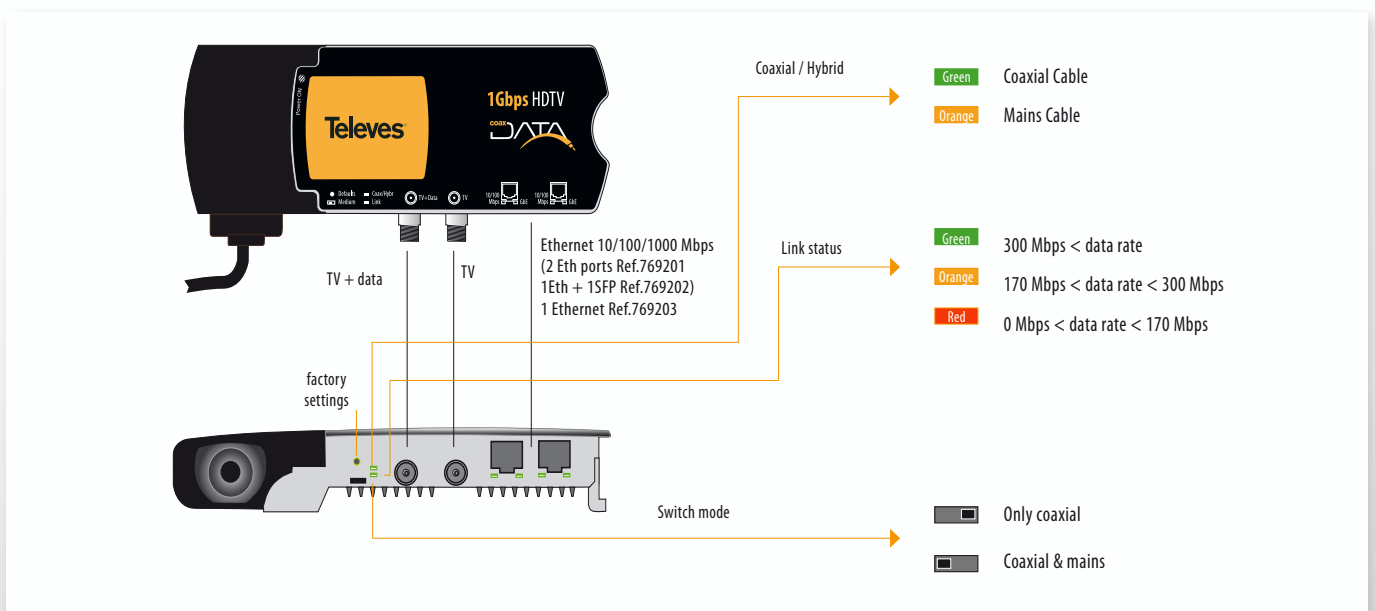

# WIRELESS ROUTER WITH LOW POWER WIFI MODE


## INTERNET THROUGH THE COAXIAL CABLE

### ✓ Technical features of CoaxData Gigabit (1 Gbps)


Reference	769201	769202	769203
Model	Gigabit (HomePlug AV IEEE1901)		
Connectors			
Data interface	2xRJ45	1xRJ45 + 1xSFP	1xRJ45
Ethernet ports	Mbps	10 / 100 / 1000	
Coaxial interface	2 x F (TV + data)		
Interfaz coaxial de datos			
Bandwidth	MHz	2 - 67,5	
Output level	dBμV	130	
Output impedance	Ω	75	
Maximum attenuation	dB	85	
TV coaxial interface			
Bandwidth	MHz	87 ... 2150	
Insertion losses		2	
Return losses	dB	> 10	
Output impedance	Ω	75	
Powering/Temperature			
Mains (50/60 Hz)	Vac	108 -254	
Max. consumption	W	6 (1.8 in Low Power Mode)	
Working temperature	°C	-10 a +45	
Firmware			
Max. No. of slaves	nº	253 (1012 using 4 masters)	
Max. long coaxial cable run	m	1200	



769220



769211




769210

### ✓ Diplexer filter and accessories

REF.	DESCRIPTION	EAN 13
769220	DIPLEX.FILTER 2I/1O "F" 2..68- 87..2150MHz	8424450167205
769211	SFP EPON 1FO.	8424450167182
769210	SFP 1000 Base-X 2 F.O.	8424450167175

#### BLOCK DIAGRAM

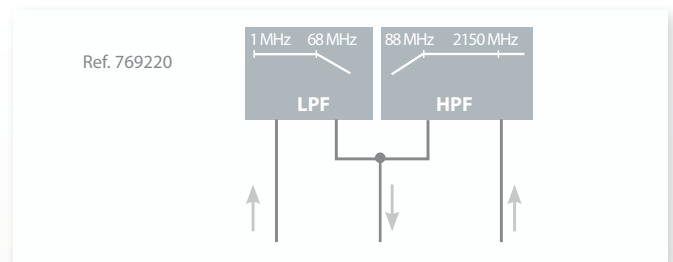

### ✓ Passion for Quality



Product manufactured and verified in our robotized lines.

