


# 980 COMPLETE MODULES

## ALOI AUDIO&VIDEO PANEL 12 DOUBLE BUTTONS

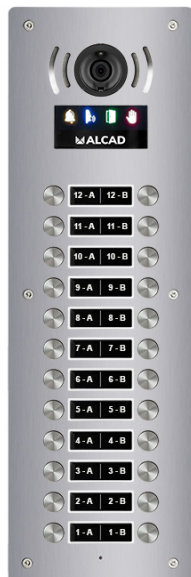

Code : **9800248**

Model : **PTD-63212**

### Description

Vandal resist entrance panel for 2-wire video intercom installations. It includes the EVG-000 main module, the same one used by the USOA entrance panel. This panel has 24 call push-buttons arranged in 2 columns.

### Entrance panel

- Construction in stainless steel AISI316L 2,5 mm thickness, with special vandal proof screws.
- 100% flat surface, without protrusions.
- Card holders, and camera and handicap icons front screens of 6mm thickness.
- Protection against impacts up to rate: IK09.
- IP55 protection from dust and low-pressure water jets from any direction.
- Attractive, professional and "Made in Spain" finishing.
- Handicap module with voice synthesizer with 14 selectable languages for "open door" message. It includes the possibility of mute mode.
- iACCESS optional. Comfort and distinction for owners and tenants.
- Automatic lighting of card holders in dark conditions (with LDR sensor)
- Camera with demisting system, which is activated automatically thanks to its humidity and temperature sensors.
- Greater audio power thanks to its two speakers.

CODE		9800248
MODEL		PTD-63212
Dimensions	mm	145 x 452
Material		AISI 316L
• Thickness	mm	2,5
Compatible flush box		9740249 CMO-612
• Dimensions	mm	125 x 435 x 50
Number of pushbuttons		24
Pushbutton Rows		12
Protection against impact rate	IK	IK09
Camera		
• Sensor		1/3" WDR CMOS ACTIVE VIEW
• Lighting		White LED
• View angle		D:170° (Wide angle)
"Door Opened" Message		14 Selectable languages
Accessibility Indicator		4 Luminous Icons
• Complying with regulations		SUA-9 (CTE)
iACCESS		Optional
Packing weight	Kg	2,28
Packing dimensions	mm	170 x 485 x 80